



ProFace

Attendance and Access Control Terminal by
Facial Recognition and Fingerprint



COLOR DISPLAY



BIOMETRIC



FACIAL
RECOGNITION



RFID



USB



TCP / IP



Access



Attendance




ProFace



Characteristics

- Triple authentication with facial recognition, fingerprint scanner and RFID reader
- 2-chamber system prevents authentication fraud
- Standalone Terminal, does not need to be connected to a PC / Server for the recognition process
- Authentication in less than 1 second
- Reduces background interference
- Reliable authentication with reduced level of lighting interference
- Touch-screen LCD screen
- Generate attendance and access of a large number of people


Dimensions

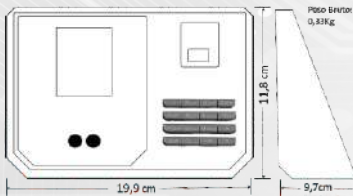

Technical Specifications

Certification	CE Marking
Camera	Dual stereo sensor with range up to 80cm
Card reader	RFID 125 KHz or Mifare Reading
Screen	TFT 2.8" in color with 320x240 pixels
keyboard	16 keypads
Communication	TCP/IP Ethernet, USB, flashdisk
Funcionamento	Completely standalone or PC controlled
Authentication	< 0.5 seconds to authenticate
Facial authentication	Standard 500 until 2.500
Fingerprint	Standard 5.000 until 10.000
Capacity	Keeps até 200 000 eventos
Ambient light	Minimum
Alarm	Doesn't have
Door Opening	1 relay for door opening or siren configurable in menu
Form / Shape	Compact
Dimensions	19.9(W) x 11.8(H) x 9.7(T) cm
Power Supply	DC 12V 1A
Temperature	0° ~ 45° C
Humidity	20% ~ 90%


Standalone Configuration

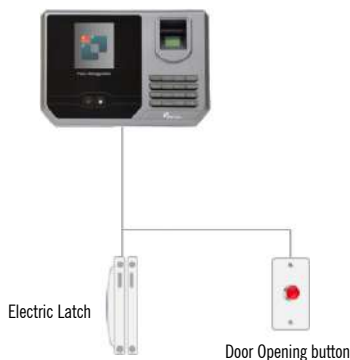

TCP/IP



Flashdisk

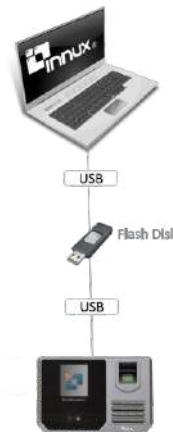

USB



All information is subject to change without notice, given the constant evolution of the product. InnuX is not responsible for any possible errors or omissions in this document.

✉ geral@innux.com

🌐 www.innux.com | www.innux.pt

T.: +351 229 812 220 T.: +351 219 618 404

All photographs and images contained in this document are subject to copyright and may not be copied or reproduced. .

© Copyright InnuX Technologies, Lda

