

# TFull

T Full Turnstile for Access Control



Access



Bidirectional



Indication LEDs



High Security





## Tfull

Full height tourniquet. Designed for a high level of security, no person without proper access authorization, you can enter or leave the site. Suitable for indoor and outdoor use.

### Technical Characteristics of the Equipment

Direction	Manual override adjustable in any direction. Optional: motorized.
Body / Frame	1.5 mm thick, AISI 304 stainless steel. Optional: AISI 316. Color options, electrostatic powder coating.
Rotor & Arms	3 wings, 10 arms. AISI 304 quality stainless steel. Optional: AISI 316. electrostatic powder coating.
Function	Ability to define the passage time. Audio warning. Remote controlled steering direction.
Emergency Mode	Free passage during power failure. After the signal received from the fire detection system, the arms can be opened.
Indicator	Standard, in both directions.
Power Supply	47 a 60 Hz.
Energy Consumption	7W during passages 12W during stand-by mode.
Passing Speed	Approximately 20 persons per minute.
Temperature	-20° / + 70° Optional: with Heater -50°
Weight	215 kg
Passage Width	56 cm


### Accessories

- Button control unit
- Remote Control
- Notification system of unauthorized passage.
- Indoor Lighting
- Coins Collector
- Heater

### Optional

- Integration with Software
- RFID Card Reader
- Biometrical Reader
- Passage Monitoring
- Rall color Lacquer
- TCP / IP Controller Board

### Technical Drawing / Dimensions

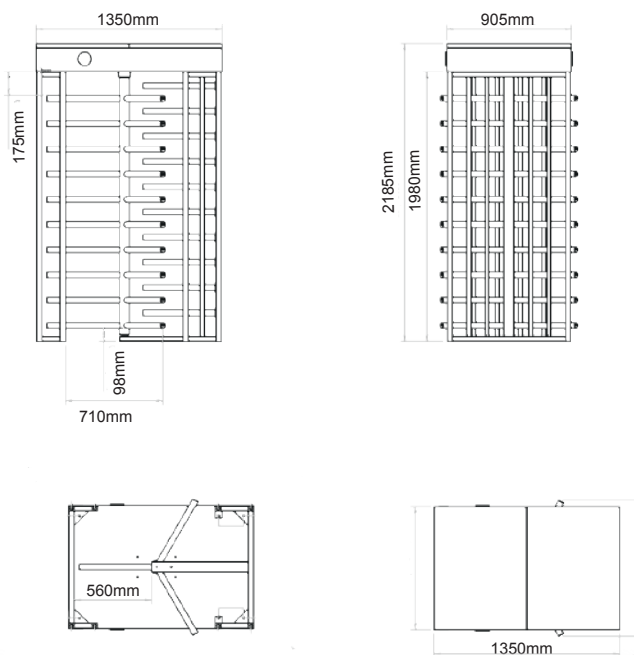

All information is subject to change without notice, given the constant evolution of the product. Innux is not responsible for any errors or omissions in this document.

✉ [geral@innux.com](mailto:geral@innux.com)

🌐 [www.innux.com](http://www.innux.com) | [www.innux.pt](http://www.innux.pt)

T: +351 229 812 220 T: +351 219 618 404

All photographs and images contained in this document are subject to copyright and may not be copied or reproduced.

© Copyright 2020 Innux Technologies, Lda

