

X - Palm

Terminal for attendance and access control
by facial recognition, fingerprint and/or RFID



FACIAL
RECOGNITION



BIOMETRIC




COLOR DISPLAY



RFID



TCP / IP






X-Palm



Characteristics

- Triple authentication with facial recognition, fingerprint scanner, palm and RFID;
- 2 camera system avoid authentication fraud;
- Standalone terminal, doesn't need to be connected to a computer;
- Authentication in less than 1 second;
- Reduces background interferences;
- Reliable authentication with reduced level of Lighting interference
- LCD touch-Screen;
- Generate attendance and access from a large number of people;

Dimensions



Technical Specifications

Certification	CE Marking
Camera	Dual stereo sensor with range up to 80 cm
Readings	Palm reading, fingerprint, facial and RFID
Screen	TFT 2.8 inches color display, with 320 x 240 pixels
Keyboard	16 keypads
Communication	TCP/IP Ethernet, USB, flashdisk
Operating	Completely standalone or computer controlled
User Records	Allows up to 200.000 user registrations
Face Authentication	Allows up to 500 facial registrations
Bio Authentication	Allows up to 6,000 biometric registrations
Languages	Portuguese, English, Spanish
Authentication	< 0,5 second for autenticate
Alarm	Doesn't have
Door Opening	1 relay for door opening or siren configurable in menu
Design	Compact
Dimensions	175 mm (W) x 145 mm(H) x 79.5 mm(T)
Power Supply	DC 12V 2A
Temperature	0° ~ 45° C
Humidity	20% ~ 90%


Standalone Configuration



TCP/IP



Flashdisk

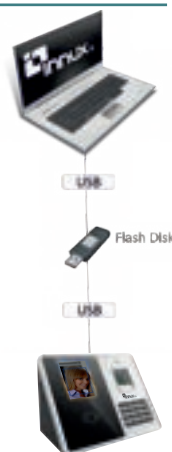

USB



All information is subject to change without notice, given the constant evolution of the product. Innux is not responsible for any errors or omissions in this document.